

5000

Quick Start Guide

Cloud Software

V5

Contents

JWM

1. [Login Software](#)
2. [Download Driver](#)
3. [Register Device Type](#)
4. [Add Device](#)

JWM

5. [Company Setup](#)
6. [Guard Setup](#)
7. [Checkpoint Setup](#)


JWM

8. [Plan Setup](#)
9. [Go to Patrol](#)
10. [Check Data](#)

Login your software

Welcome to JWM-Cloud Patrol!

This short guide will help you configure all basic settings needed to setup your JWM-Patrol account for first time and learn about all the necessary steps in order to quickly manage patrols.

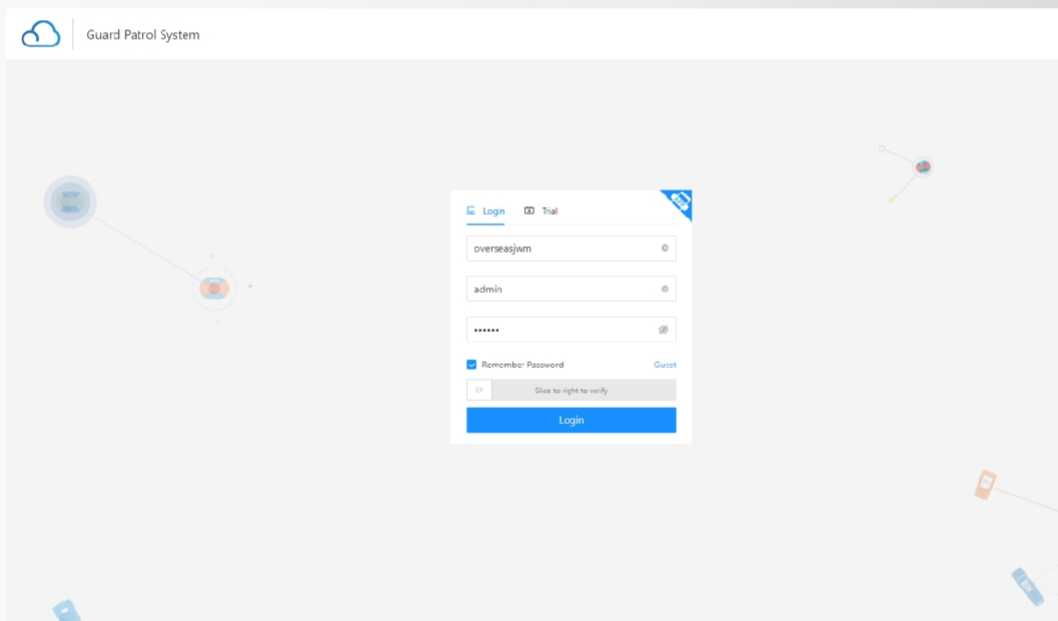


● <https://jwmyun.com/>

● Inputting the Company Name , Username and the Password of the user. Then login the software.






Download Driver

Before patrolling, the first step is download the driver for the device. The driver is **mandatory** that makes the reader connect successfully.


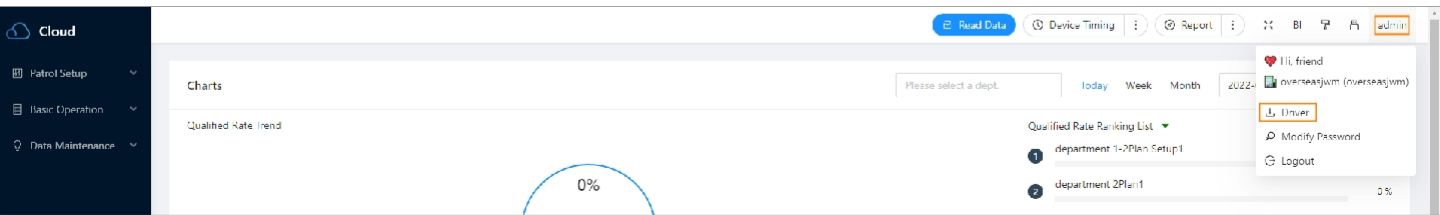


Note: If you have encountered anti-virus software interception, please install the software at ease.

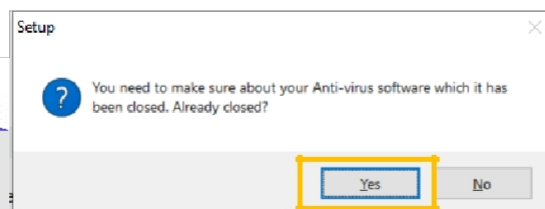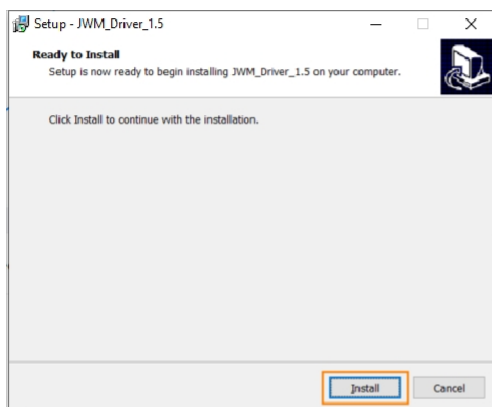



Register Device Type

You need to register the device on the cloud software first.

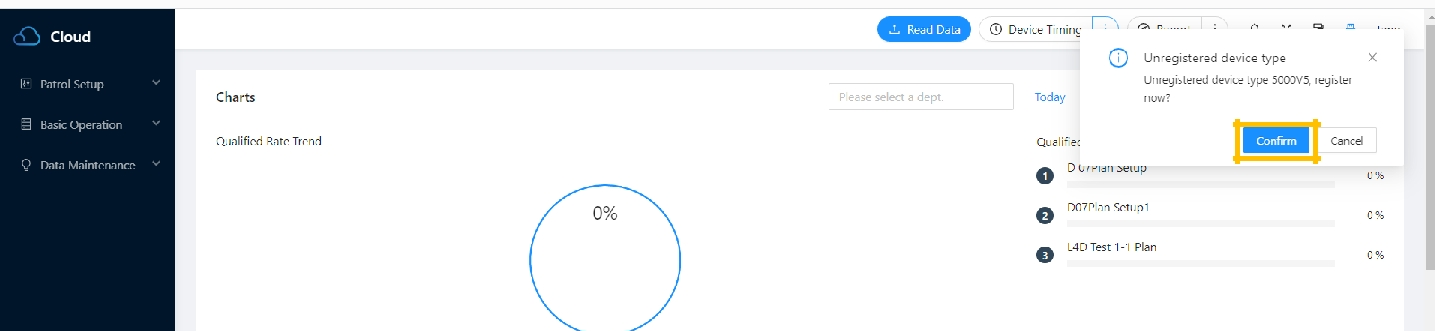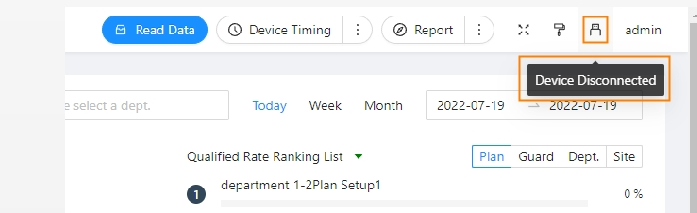

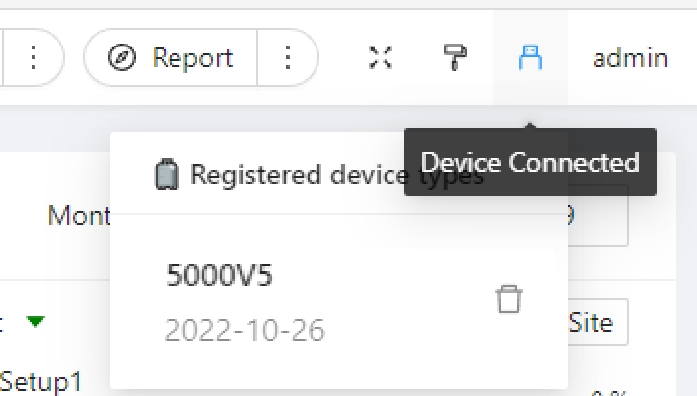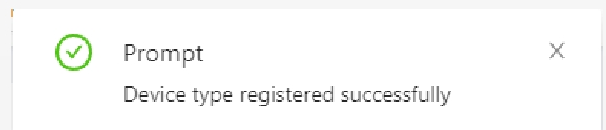

After connecting the device, this icon will turn into blue, and you could see the device type here.





Note:

Device cannot communicate with software by cable, when it registers to the internet or send data.

 **Cloud**

 Patrol Setup

 Basic Operation

 Data Maintenance

Device List

System Settings

Permission Setup

Operator Setup

Add Device

A

D

Add Device

Find “Device List”


Click “Add Device” under “Data Maintenance”, then it will show device code, type and other information.

<input type="checkbox"/>	Device Code	Device Type
<input type="checkbox"/> 1	0C13-22449900	5000V5

Device Timing


Report

admin



Prompt

Device added successfully




Company Setup

Find “Company Setup”

You need to add a new company for bind of the checkpoints with the security guards.

Click “Add Company” to create a new company.

You could add subsidiary below the company.
You also could edit or delete them.

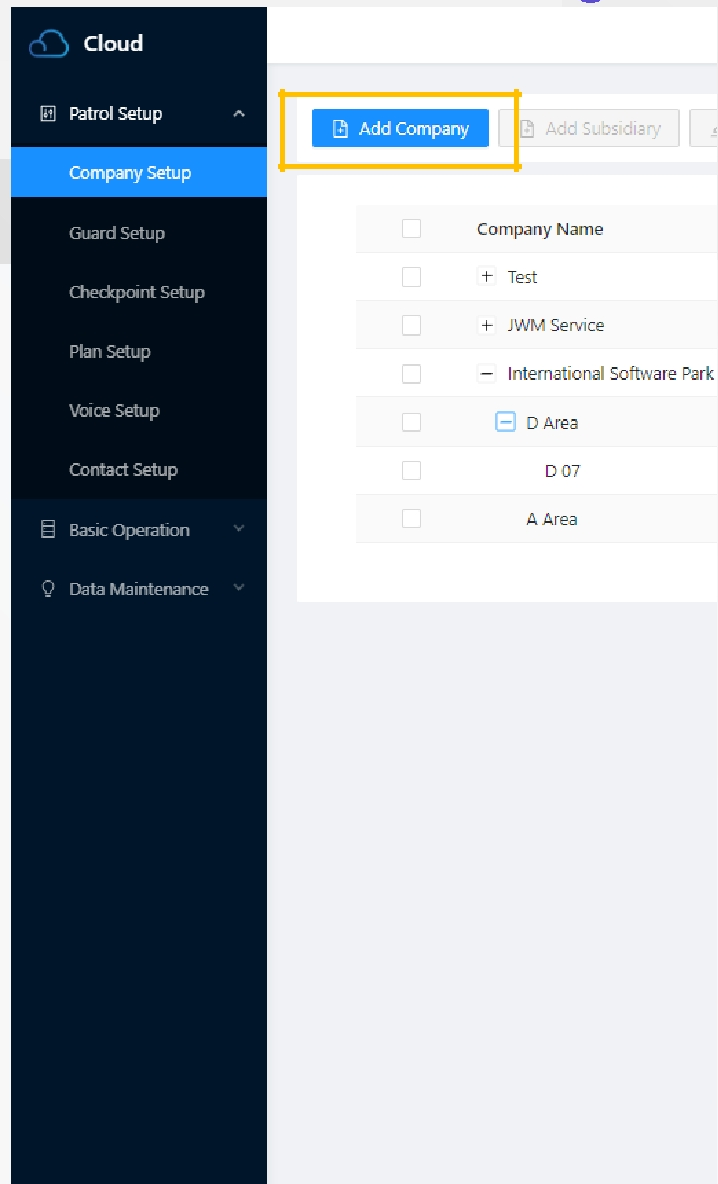

[Add Company](#)

[Add Subsidiary](#)

[Edit Company](#)

[Delete Company](#)

[Return Home](#)

Guard Setup (Optional)

Find “Guard Setup”

After reading the guard ID tags, click “Batch Read” to add guards. Here you can also edit or delete guard.

Cloud

Patrol Setup

Company Setup

Guard Setup

Checkpoint Setup

Plan Setup

Voice Setup

- Batch Read
- Add Guard
- Import Guard
- Export Guard
- Return Home

Test

JWM Service

International Software Park

- D Area
 - D07(1)
 - A Area

	Guard ID	Guard Name	Operate
<div><div></div><div>1</div></div>	A716410908	Ivan	Edit



Data Maintenance

Note: You could also add guard directly, the ID will be filled in automatically.

Checkpoint Setup



Prompt



Batch read successfully, the total records is: 3

[Batch Read](#) [Download Data](#) [Import Checkpoint](#) [Export Checkpoint](#) [Return Home](#)

> Test
> JWM Service
> International Software Park
 > D Area
 > 07(7)
 > A Area

<input type="checkbox"/>	Type	Checkpoint ID	Checkpoint Name	Position	Voice	Operate
<input type="checkbox"/> 1	EM code	0C00A50D40	Fire door	✓	+	Edit
<input type="checkbox"/> 2	EM code	0E00A176E1	Workshop	✓	+	Edit
<input type="checkbox"/> 3	EM code	0E00A5A3E1	Meeting room	✓	+	Edit

Guard Setup

Checkpoint Setup

Plan Setup

Voice Setup



Contact Setup

Basic Operation

Data Maintenance

Find “Checkpoint Setup”

Use device to read checkpoints, then click “[Batch Read](#)” to add them. Here you can also edit or delete checkpoints.

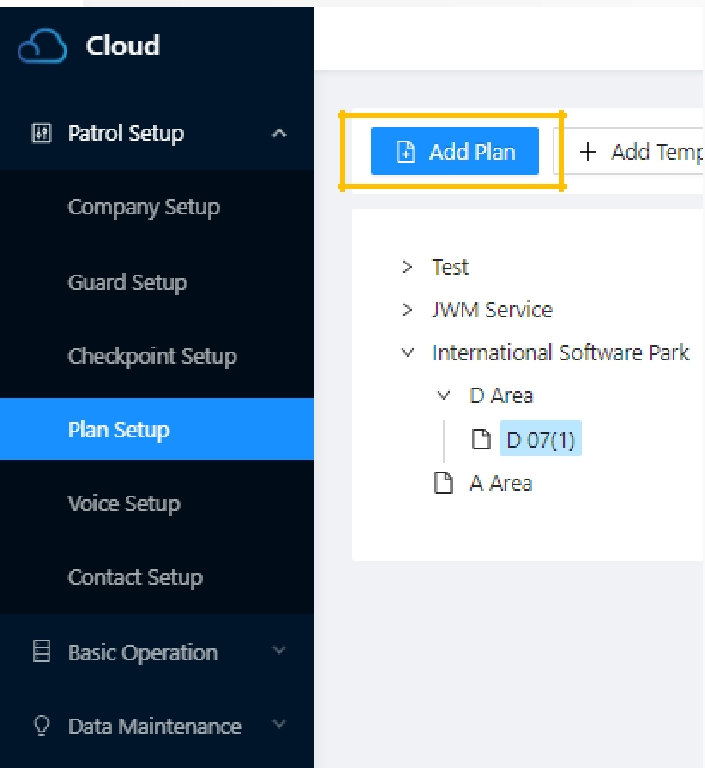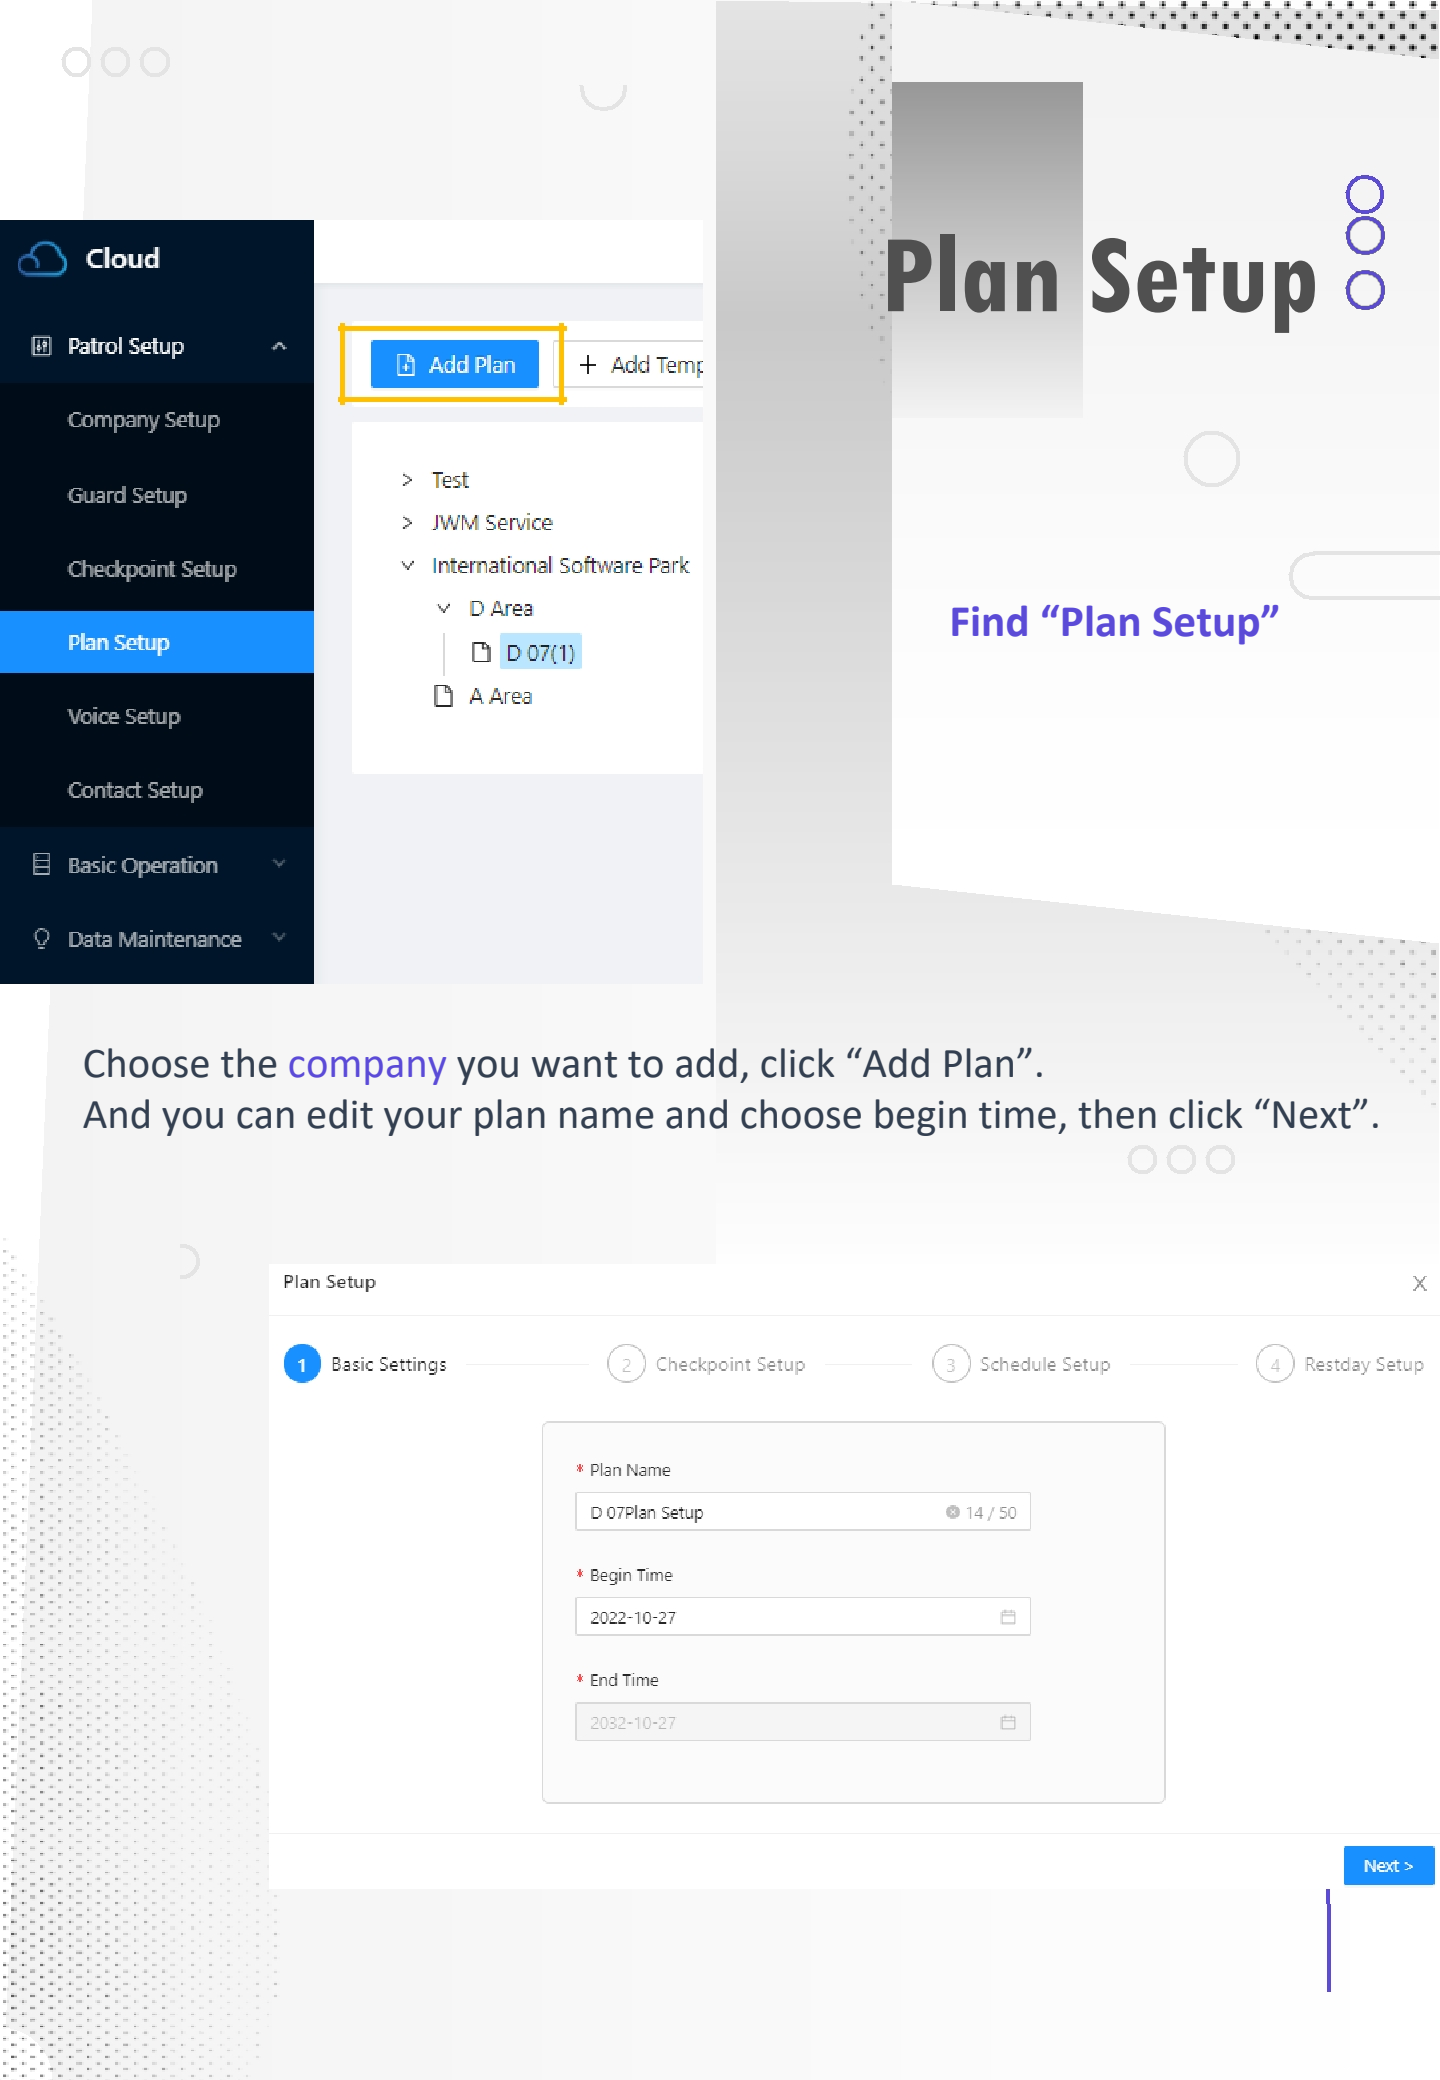

Plan Setup

Find “Plan Setup”

Choose the **company** you want to add, click “Add Plan”.
And you can edit your plan name and choose begin time, then click “Next”.

Plan Setup

1 Basic Settings — 2 Checkpoint Setup — 3 Schedule Setup — 4 Restday Setup

* Plan Name

D 07Plan Setup 14 / 50

* Begin Time

2022-10-27

* End Time

2032-10-27

Next >

Plan Setup

Plan Setup

X

✓ Basic Settings — 2 Checkpoint Setup — 3 Schedule Setup — 4 Restday Setup

2/4 items

Not Selected Checkpoints

☐ Firedoor (D 07)

☒ Workshop (D 07)

☒ Meeting room (D 07)

☐ D 08-1 (D 07)

>

<

3 items

Selected Checkpoints

☐ West door (D 07)

☐ D 06-1 (D 07)

☐ Back door (D 07)

< Prev

Next >



Select the **checkpoints** you want to bind with this plan, then click “Next”

Plan Setup

Plan Setup

X

✓ Basic Settings — ✓ Checkpoint Setup — 3 Schedule Setup — 4 Restday Setup

Batch Schedule

+ Add Schedule

- Delete Schedule

Guard Setup

Patrol Schedule

	Schedule	Begin Time	End Time	Guard Name	Operate
--	----------	------------	----------	------------	---------

For plan, if you have a regular and repeat shift, we can use “Batch Schedule” to make the plan in an easier way.

All this information you could edit or choose as you need.

Patrol Schedule

Patrol Schedule

No 1 day

Guard Name

Ivan

Begin Time

06:00

The next day

End Time

18:00

The next day

Time for Patrol One Time (minutes)

120

Rest Time (minutes)

15

X Cancel



Plan Setup

Plan Setup

Basic Settings — Checkpoint Setup — **3 Schedule Setup** — 4 Restday Setup

Batch Schedule + Add Schedule — Delete Schedule Guard Setup

Patrol Schedule

	Schedule	Begin Time	End Time	Guard Name	Operate
--	----------	------------	----------	------------	---------

Patrol Schedule

Patrol Schedule

No 1 day

Guard Name

Ivan

Begin Time

19:00

The next day

End Time

20:00

The next day

X Cancel

For plan, you could also use "Add Schedule" to make an independent plan

Similarly, all this information you could edit or choose as you need.

Plan Setup

Week Rest

Saturday x Sunday x

Special Rest

+ Add Rest

☐

Rest

☐

1

2022-10-05

Next, you can set some **rest day** in each plan for your guards.
And some **special rest** also can be set ,such as Christmas day.

[Add Plan](#) [+ Add Temporary Plan](#) [Export Plan](#) [Return Home](#)

L4D Test

- L4D Test 1
 - L4D Test 1-1(1)
- L4D Test 2

Plan

Special Plan

<input type="checkbox"/>	Plan Name	Begin Time	End Time	Device Code	Operate				
<input type="checkbox"/>	1 L4D Test 1-1 Plan	2022-07-20	2022-07-20		Edit				
	Start and end time	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday	Guard Name
1	No 1 day 06:00~08:00	√	√	√	√	√	x	x	Ivan
2	No 1 day 08:30~10:30	√	√	√	√	√	x	x	Ivan
3	No 1 day 11:00~13:00	√	√	√	√	√	x	x	Ivan
4	No 1 day 13:30~15:30	√	√	√	√	√	x	x	Ivan
5	No 1 day 16:00~18:00	√	√	√	√	√	x	x	Ivan
6	No 1 day 19:00~21:00	√	√	√	√	√	x	x	Ivan

All the plan information is done, you could see it [here](#).

[Add Plan](#)

[+ Add Temporary Plan](#)


[Export Plan](#)

[Return Home](#)

You could also add a temporary plan, step is **the same as** “Add Plan”, The only difference is: temporary plan could set **end time**.

○○○

Go to Patrol

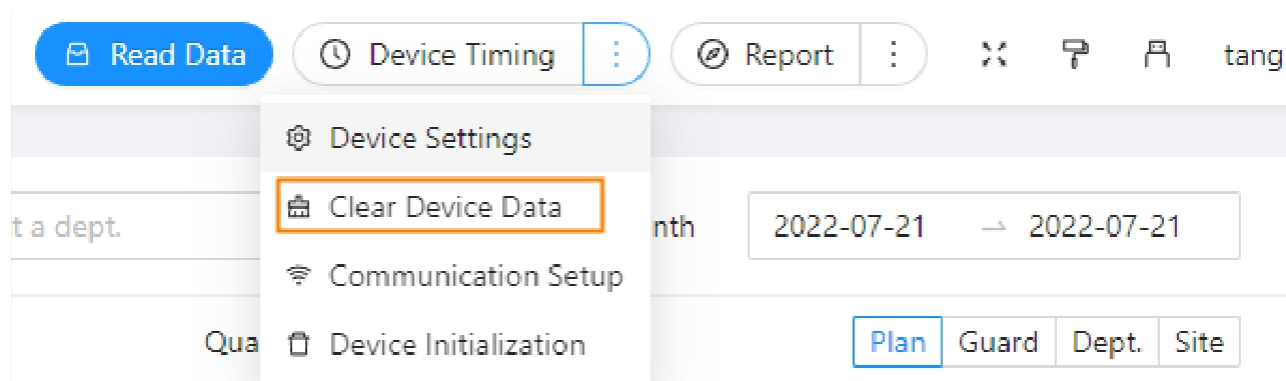


This screenshot shows the 'Device Timing' menu in a software interface. The menu is open, displaying several options: 'Device Settings', 'Clear Device Data' (which is highlighted with an orange border), 'Communication Setup', and 'Device Initialization'. The background interface includes a top navigation bar with buttons for 'Read Data', 'Device Timing', and 'Report'. Below the navigation bar, there are input fields for a date range (2022-07-21 to 2022-07-21) and a table with columns labeled 'Plan', 'Guard', 'Dept.', and 'Site'.



This screenshot shows the 'Device Timing' button in the software interface, which is highlighted with an orange border. The button is located in the top navigation bar, next to the 'Read Data' and 'Report' buttons.

○

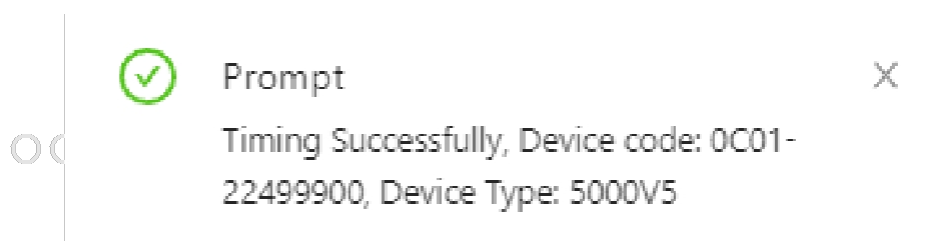


This screenshot shows a success prompt message in a dialog box. The message is titled 'Prompt' and contains the text: 'Timing Successfully, Device code: 0C01-22499900, Device Type: 5000V5'. There is a green checkmark icon on the left and a close button (X) on the right.

Before you are going to patrol, remember to clear device data & device timing to **avoid some confusion** about report data.

Check Data

Find “Patrol Report”

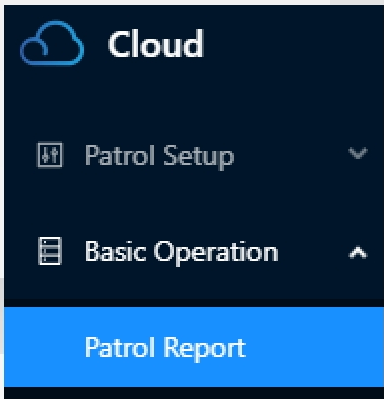

Company Name: D 07 x D Area x

Checkpoint Name: Please select checkpoint

Guard Name: Please select guard

Plan Name: D 07Plan Setup x

Device Code: Please select device

Data Type: All Data


Begin Time: 2022-09-30 00:00

End Time: 2022-10-01 00:00

Reset Query Collapse

You could check report by different condition here.

Click “Query”, it will show the report data you need.

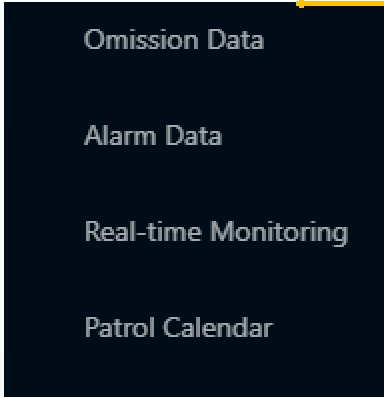


All Times 42 Arrived Times 10 Omission Times 7 To Patrol Times 23

Export Excel Export Pdf Return Home

Company Name		Plan Guard	Plan Name	From To	Plan Times	Arrived Times	Omission Times	Patrol Time	
+	1	D 07	Ivan	D 07Plan Setup	2022-09-30 06:00~2022-09-30 08:00	7	0	7	0:00:00
+	2	D 07	Ivan	D 07Plan Setup	2022-09-30 08:15~2022-09-30 10:15	7	7	0	0:26:54
☰	3	D 07	Ivan	D 07Plan Setup	2022-09-30 10:30~2022-09-30 12:30	7	3	4	0:02:15
	Checkpoint Name		Guard Name	Device Code	Patrol Time	Patrol Times		Remain Time	
1	■	Filedoor	Ivan	1407-22359900	2022-09-30 10:35:31	15		0:08:19	
2	■	Workshop	Ivan	1407-22359900	2022-09-30 10:37:46	3		0:05:13	
3	■	Meeting room	Ivan	1407-22359900	2022-09-30 10:37:05	1		-	
4	■	D 08-1	Ivan	-	-	0		-	
5	■	West door	Ivan	-	-	0		-	
6	■	D 06-1	Ivan	-	-	0		-	
7	■	Back door	Ivan	-	-	0		-	
+	4	D 07	Ivan	D 07Plan Setup	2022-09-30 12:45~2022-09-30 14:45	7	0	7	0:00:00
+	5	D 07	Ivan	D 07Plan Setup	2022-09-30 15:00~2022-09-30 17:00	7	0	7	0:00:00
+	6	D 07	Ivan	D 07Plan Setup	2022-09-30 19:00~2022-09-30 20:00	7	0	7	0:00:00

And you could export Excel or Pdf for later use.

Check Data

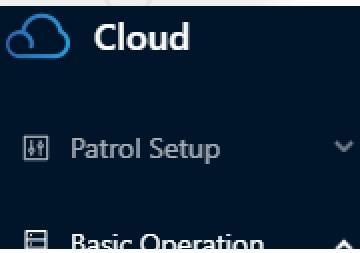

Company Name: D 07 x D Area x


Checkpoint Name: Please select checkpoint

Statistics Type: Statistics as Company




Begin Time: 2022-09-30 00:00

End Time: 2022-10-01 00:00

Reset Query Collapse

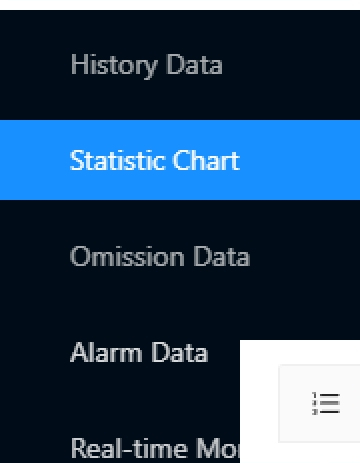

You could check by **different condition** here too. There are 3 different charts you could choose for your need.

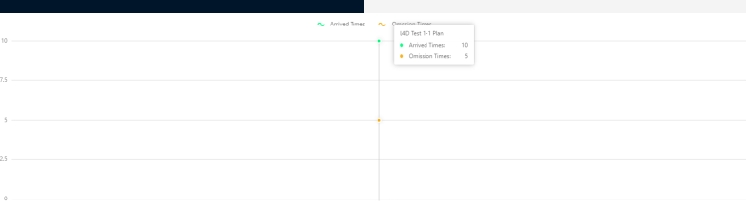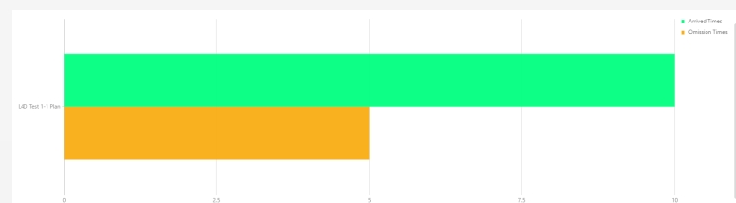

And statistic can be export to pdf and excel.

Make Patrol Easier

Do you have any questions?

support@jwm-rfid.com

Thanks!
for choosing JWM